

Creating CV-3 diagram

Before creating CV-3 diagram, the CV-1 diagram with all necessary elements should be already created in the model. For this, click [here](#). Otherwise, you can create those elements directly in the blank CV-3 chart. The following elements required for a smooth CV-3 diagram creation:

- Capability.
- Capability Provision.
- Incremental Milestone.
- End of Service Milestone.

The following procedures describe how to:


- Create CV-3 diagram by using the [CV-3 Creation Wizard](#).
- Create an CV-3 diagram when [CV-3 Creation Wizard](#) is disabled.
- Fill in a blank CV-3 diagram.

Creating CV-3 diagram by using the CV-3 Creation Wizard

When you choose to create a new CV-3 diagram, [CV-3 Creation Wizard](#) opens automatically.

To create a CV-3 diagram from the wizard

1. Right-click the CV-3 Package and select **Create Diagram > CV-3 Capability Phasing**.
2. Follow the steps of the [CV-3 Creation Wizard](#).
3. Click **Finish** when you are done.

 If you do not wish to use the [CV-3 Creation Wizard](#) next time, clear the **Show the wizard next time, when I create CV-3** check box.

Creating an CV-3 diagram when CV-3 Creation Wizard is disabled

To create an CV-3 diagram manually when [CV-3 Creation Wizard](#) is disabled


1. Right-click the CV-3 Package and select **Create Diagram > CV-3 Capability Phasing**.
2. Type the diagram name.
3. Press Enter.
The blank CV-3 chart is created.

 To restore the usage of the [CV-3 Creation Wizard](#)

Filling in a blank CV-3 diagram

To fill in a blank CV-3 diagram

1. In the **Environment Options** dialog select the **UAF** options group.
2. In the General properties, set the **Show CV-3/StV-3/NCV-3 Creation Wizard each Time** property value to **true**.
3. **Creating New Chart** property value to **true**.
 - To create new Capability, in the diagram toolbar, click the **Add New** button and select Capability.
 - To add already existing Capability from the model, in the diagram toolbar, click the **Add Existing** button and select Capability.

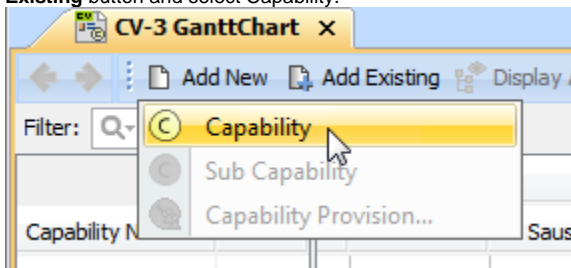

2. Type the name of added Capability.

Related procedures

- [Customizing Gantt chart properties](#)

