



# Row and column element shortcut menu

To open a row/column element shortcut menu

- Right-click the appropriate row/column.

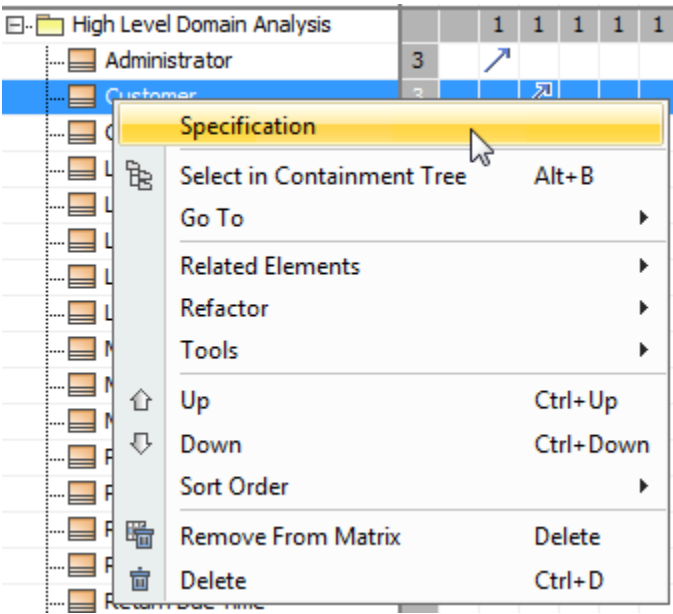

Command (Shortcut key)	Description
Specification	Opens the element's <a href="#">Specification window</a> .
Select in Containment Tree	Selects the element in the <a href="#">Containment tree</a> of the <a href="#">Model Browser</a> .
Go To	Finds and navigates to a diagram which is owned by the selected element, or to the one, wherein the element shape is drawn, or to a hyperlinked object, or to an element to which the selected element is related through a traceability relationship. For more information, see <ul style="list-style-type: none"><li>• <a href="#">Element usage in diagrams</a></li><li>• <a href="#">Inserting hyperlinks</a>,</li><li>• <a href="#">Traceability properties in Go To submenu</a></li></ul>
Related Elements	Opens the dialog for defining options to search for specified usages or dependencies of the selected element. For more information, see <a href="#">Analyzing usages and dependencies</a> .
Refactor	<a href="#">Converts or replaces</a> the selected element to an element indicated by the user.
Tools	Opens a list of <a href="#">tools</a> that are available for the selected element.
Up (Ctrl+Up Arrow)	Moves selected rows (either grouped or non-grouped) up. The command is available on the shortcut menu of one or more rows.
Down (Ctrl+Down Arrow)	Moves selected rows (either grouped or non-grouped) down. The command is available on the shortcut menu of one or more rows.
Left (Ctrl+Left Arrow)	Moves selected columns (either grouped or non-grouped) left. The command is available on the shortcut menu of one or more columns.
Right (Ctrl+Right Arrow)	Moves selected columns (either grouped or non-grouped) right. The command is available on the shortcut menu of one or more columns.

<b>Sort Order</b>	<p>Point to the command and select the order for sorting rows or columns. It can be either Ascending or Descending. Selecting Custom does not affect the order of rows/columns. The Custom order is automatically selected after shifting at least one row or column to from one place to another.</p> <p>The sort order persists after changing the row or column owner's display mode, which can be defined by the <b>Row Owner Display Mode</b> or <b>Column Owner Display Mode</b> property in the matrix <a href="#">Specification window</a>.</p>
<b>Remove from Matrix</b>	<p>Removes the selected element from the matrix.</p>
<b>Delete</b>	<p>Deletes the selected element from both the matrix and the model.</p> <div> If you undo the deletion, you should refresh the matrix to make the deleted elements appear in the matrix again.</div>