

Working with Sr Services Roadmap

To work with a Services Roadmap diagram

- 1 [Create new Version Of Configuration](#)
- 2 [Define the Service Specification for the Version Of Configuration](#)
- 3 [Removing Service Specification from a Services Roadmap diagram](#)
- 4 [Removing Version of Configurations from a Services Roadmap diagram](#)

Create new Version Of Configuration

To create new Version Of Configuration in Service Roadmap diagram


- 1. Click the **Add New** button and select Version of Configuration.
- 2. Type the name of the newly created Version of Configuration.

Define the Service Specification for the Version Of Configuration

To define the resource for the Version Of Configuration

- 1. Do one of the following:
 - In the diagram pane, select a Version of Configuration and in the diagram toolbar, click **Add New > Service Specification**.
 - In the diagram pane, right-click a Version Of Configuration and select **Service Specification**.
 - In the Containment tree, select a Service Specification and drag it onto the Version of Configuration. (In this case, the [Service Specification Assignment Wizard](#) opens in the second step.)
The [Service Specification Assignment Wizard](#) opens.
- 2. Follow the steps of the wizard.

The result of this procedure is as the following figure.

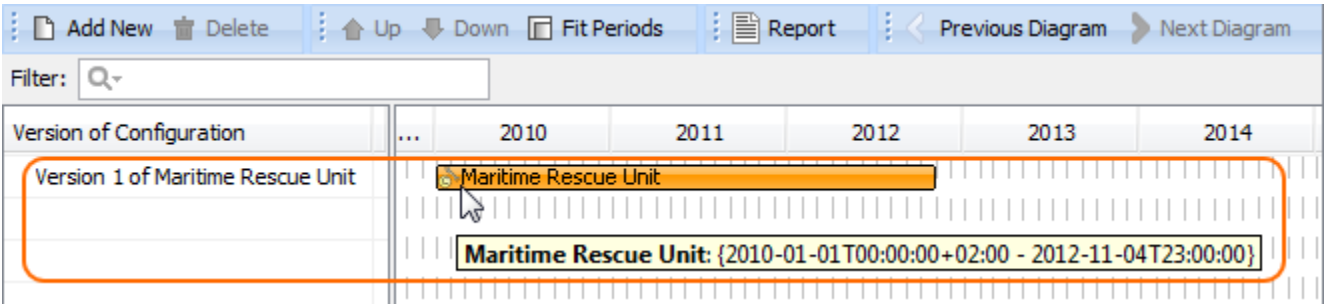

Removing Service Specification from a Services Roadmap diagram

To remove a Service Specification

- 1. Right-click the Service Specification bar and from the shortcut menu, select **Remove > Service Specification** <name of the resource you want to remove>.

Removing Version of Configurations from a Services Roadmap diagram

To delete a Version of Configuration

- 1. Select a Version of Configuration.
- 2. On the diagram toolbar, click the **Delete** button.