
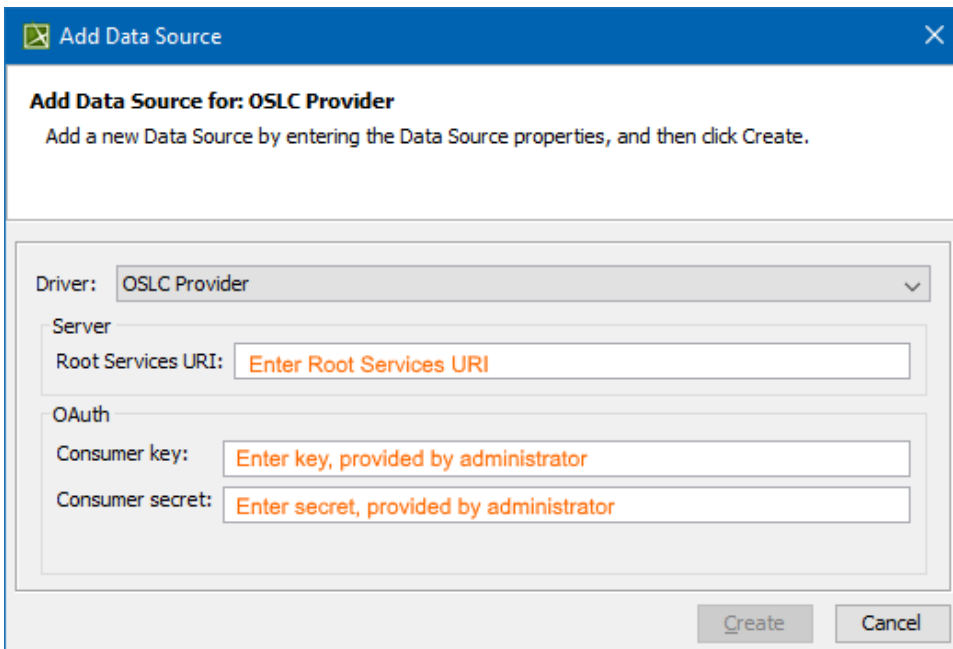


# Adding Data Sources for an OSLC Provider

To add a Data Source for an OSLC Provider

1. Click  on the **DataHub Explorer** toolbar. The **Add Data Source** dialog opens.
2. From the **Driver** drop-down list, select **OSLC Provider**.



The screenshot shows the 'Add Data Source' dialog box with the title 'Add Data Source for: OSLC Provider'. Below the title is a subtitle: 'Add a new Data Source by entering the Data Source properties, and then click Create.' The dialog contains a 'Driver' dropdown menu set to 'OSLC Provider'. Below this is a 'Server' section with a 'Root Services URI' text box containing the placeholder 'Enter Root Services URI'. Underneath is an 'OAuth' section with two text boxes: 'Consumer key' with the placeholder 'Enter key, provided by administrator' and 'Consumer secret' with the placeholder 'Enter secret, provided by administrator'. At the bottom right are 'Create' and 'Cancel' buttons.

3. Enter the **Root Services URI**, **Consumer key**, and **Consumer secret** (provided by your administrator).
4. Click **Create**.

The new OSLC Provider is added to the **DataHub Explorer** tree.