


# Working with Typical Measurements table

To create a Typical Measurements table

1. Do one of the following:
  - Click the **Add New** button and from the drop-down list select **Property Set**. The new row in the table is created. Type the name of the Property Set and specify the Measurements of the selected Property Set.
  - Click the **Add Existing** button to add an existing Property Set to the table.
2. Click the **Evaluate Measurements** button to create the Actual Measurements table automatically.

In the Typical Measurements table, you can select one of the Display Modes:

- **Owned Measurements** - collects only owned measurements.
- **All Measurements** - collects all measurements hierarchically with primitive types.

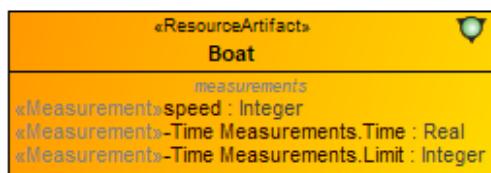


All Measurements display mode

#	Property Set	Measurements
1	Boat	Speed : Integer Time : Real Limit : Integer

Owned Measurements display mode

#	Property Set	Measurements
1	Boat	Speed : Integer Time Measurement Group : Time Measurements



The created instances are stored in the same location as the Typical Measurements table.

## Related pages

- [Property Set elements for measurement tables](#)