


Adding Data Sources for an OSLC Provider

To add a Data Source for an OSLC Provider

1. Click  on the **DataHub Explorer** toolbar. The **Add Data Source** dialog opens.
2. From the **Driver** drop-down list, select **OSLC Provider**.

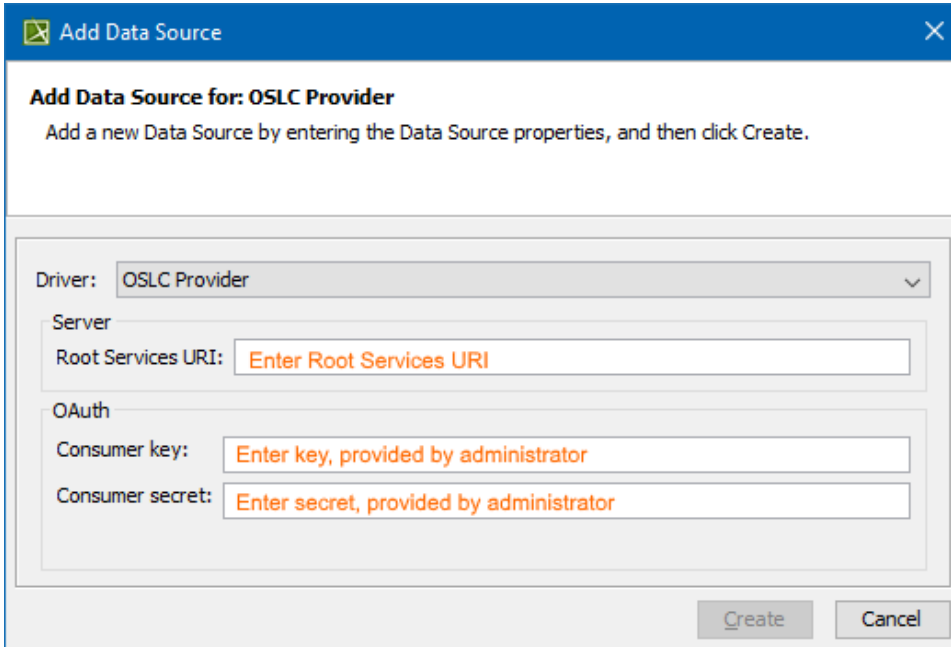

The screenshot shows the 'Add Data Source' dialog box with the title 'Add Data Source for: OSLC Provider'. Below the title is a subtitle: 'Add a new Data Source by entering the Data Source properties, and then click Create.' The dialog contains a 'Driver' dropdown menu set to 'OSLC Provider'. Below this is a 'Server' section with a 'Root Services URI' text box containing the placeholder 'Enter Root Services URI'. Below the 'Server' section is an 'OAuth' section with two text boxes: 'Consumer key' containing 'Enter key, provided by administrator' and 'Consumer secret' containing 'Enter secret, provided by administrator'. At the bottom right are 'Create' and 'Cancel' buttons.

3. Enter the **Root Services URI**, **Consumer key**, and **Consumer secret** (provided by your administrator).
4. Click **Create**.

The new OSLC Provider is added to the **DataHub Explorer** tree.