

Using simulation command line and showing test results through Jenkins



Note

In these scenarios, all related items on this page to be used are in the [TestSimulationCommandLine.zip](#) sample.

To prepare a simulation project and Configs in MagicDraw


1. Create a simulation model with Behaviors, e.g., *TestVerdictKind.mdzip*.
2. Apply «TestCase» to the Behaviors so the pass/fail status will be returned to the VerdictKind Activity parameters.
3. Create Simulation Configs and set those Behaviors as **executionTarget** of those Simulation Configs.



Note

All required resources must be available for the Simulation Configs, e.g., loadCSV and fmu. All features preventing simulation from the start/terminate, e.g., false autoStart, context without Classifier Behavior, chart windows at the end of execution, or output parameters at the end of execution (running Activity) will also be automatically started/terminated.

4. Run each Simulation Config to verify that an expected result, either pass or fail, must be returned.

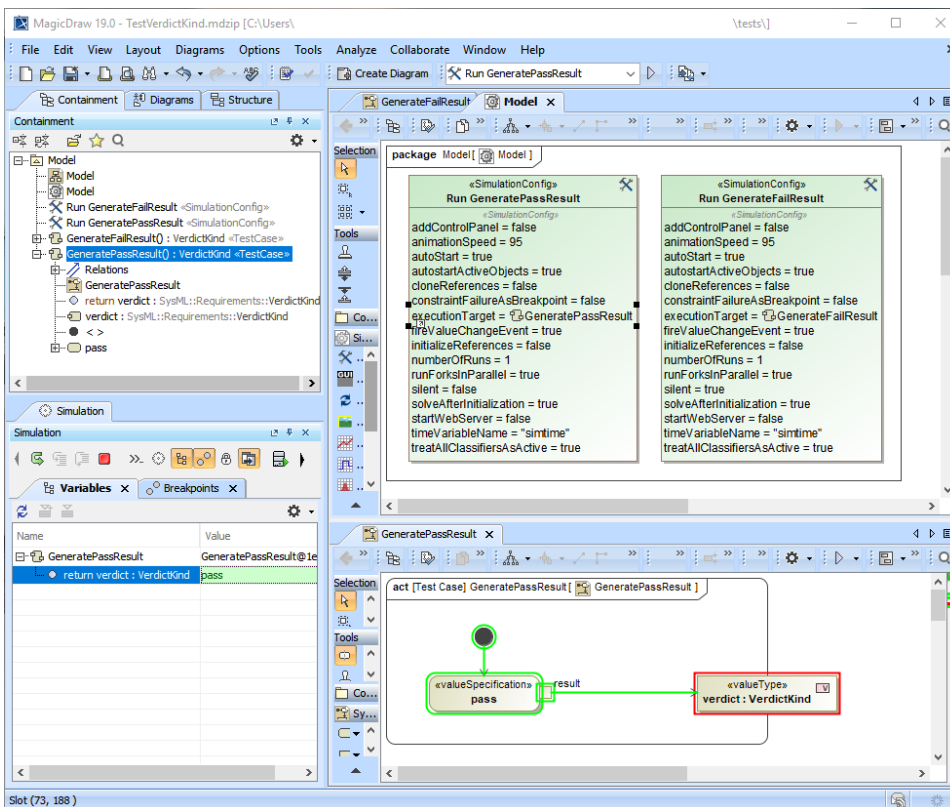

Preparing a simulation project and Configs in MagicDraw.


To run a project through simulate command line

1. Run the command line console, e.g., cmd on Windows.
2. In the console, type any commands to go to the local installation of MagicDraw.
3. Go to the **plugins\com.nomagic.magicdraw.simulation** folder.
4. Use the following **simulate command** syntax: `simulate -project "[Path of an MDZIP project]" -config "[Config]"`.

In this case, the following commands are used:

```
simulate -project "D:\\Simulation\\API\\TestVerdictKind.mdzip" -config "Run GeneratePassResult"
simulate -project "D:\\Simulation\\API\\TestVerdictKind.mdzip" -config "Run GenerateFailResult"
```

- At the last line of the command prompt, **pass** or **fail** appears. You can also see the details of execution through the [Simulation Log File](#).

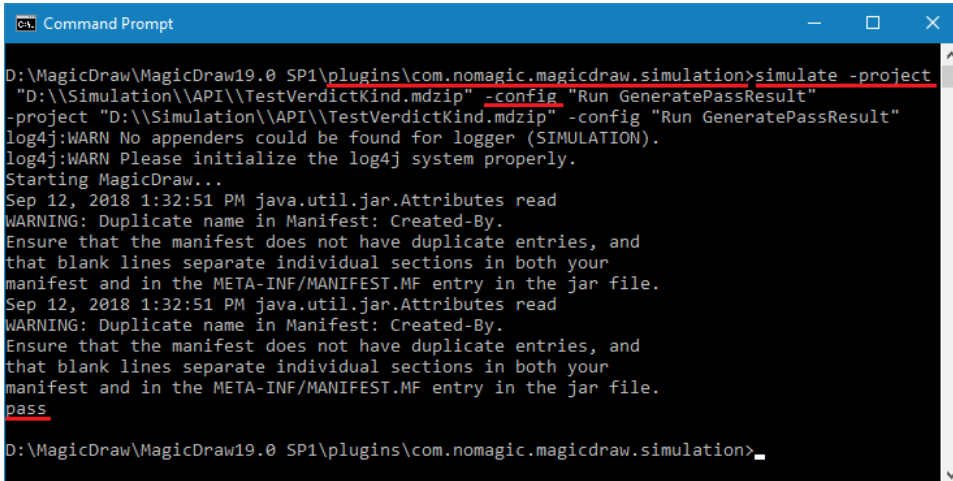

```
D:\MagicDraw\MagicDraw19.0 SP1\plugins\com.nomagic.magicdraw.simulation>simulate -project
"D:\\Simulation\\API\\TestVerdictKind.mdzip" -config "Run GeneratePassResult"
- -project "D:\\Simulation\\API\\TestVerdictKind.mdzip" -config "Run GeneratePassResult"
log4j:WARN No appenders could be found for logger (SIMULATION).
log4j:WARN Please initialize the log4j system properly.
Starting MagicDraw...
Sep 12, 2018 1:32:51 PM java.util.jar.Attributes read
WARNING: Duplicate name in Manifest: Created-By.
Ensure that the manifest does not have duplicate entries, and
that blank lines separate individual sections in both your
manifest and in the META-INF/MANIFEST.MF entry in the jar file.
Sep 12, 2018 1:32:51 PM java.util.jar.Attributes read
WARNING: Duplicate name in Manifest: Created-By.
Ensure that the manifest does not have duplicate entries, and
that blank lines separate individual sections in both your
manifest and in the META-INF/MANIFEST.MF entry in the jar file.
pass
D:\MagicDraw\MagicDraw19.0 SP1\plugins\com.nomagic.magicdraw.simulation>
```


Running the project through the simulate command line.

To create a JUnit test case and configuration file

- Include the JUnit library in the Java project by creating a new Java project and adding the **JUnit 4** library in **current location** using the Eclipse's JUnit.
- Create a new JUnit test case, e.g., [Test Simulation Command Line.java](#).
- Compile the test case and create a JAR file, e.g., **TestSimulationCommandLine.JAR** from the test case.
- Create properties file, e.g., **TestGeneratePassResult.properties** and **TestGenerateFailResult.properties**.
- Create an [Ant configuration file](#), e.g., **run_junit.xml**.

To configure Jenkins for the Automated testing

- Create a new Jenkins project.
- Specify a **Project Name**, e.g., *Test Simulation Command Line*.
- Go to **Advanced Project Options**, click **Advanced**, and select **Use custom workspace**.

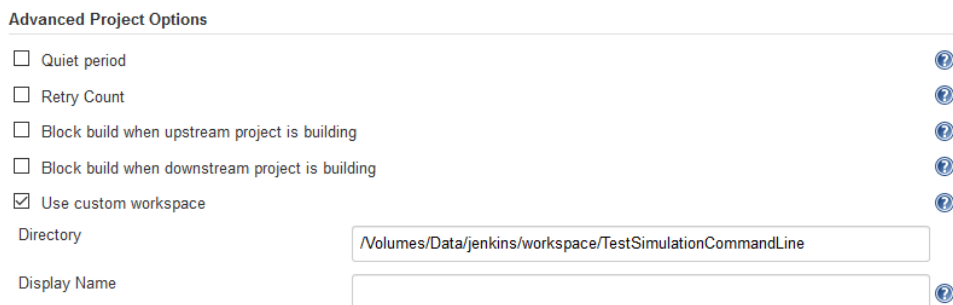

Advanced Project Options

☐ Quiet period ?

☐ Retry Count ?

☐ Block build when upstream project is building ?

☐ Block build when downstream project is building ?

☒ Use custom workspace ?

Directory

Display Name

- In the **Directory** box, specify a path to the directory that contains **run_junit.xml** ([Ant configuration file](#)).
- Go to **Build** and click **Add build step**. Select **Invoke Ant**.
- In the **Targets** box, type **build**.

Build

Invoke Ant

Ant Version

Targets

Build File

Properties

Java Options

7. Select **Advanced**. In the **Build File** box, type **run_junit.xml**.
8. In the **Properties** box, specify **md.root**=[MagicDraw installation directory] and **properties.files.dir**=[Path containing the properties files], as shown in the example above.



Tip

The path containing the property files can be either an absolute (full) path, e.g., `C:\Users\User\Desktop\TestSimulationCommandLine\tests` or relative path, e.g., `tests`.

9. Go to **Post-build Actions** and click **Add post-build action**. Select **Publish JUnit test result report**.
10. In the **Test report XMLs** box, specify a path to JUnit XML files, e.g., `test-reports/**TEST*.xml`.

Post-build Actions

-->

Publish JUnit test result report

Test report XMLs

Fileset 'includes' setting that specifies the generated raw XML report files, such as 'myproject/target/test-reports/*.xml'. Basedir of the fileset is [the workspace root](#).

☐ Retain long standard output/error

Health report amplification factor

1% failing tests scores as 99% health. 5% failing tests scores as 95% health

[Advanced...](#)

11. Run the build. Test Result will be shown and allows you to view more details for those test cases.

Jenkins [Administrator](#) | [log out](#)

[Jenkins](#) > [Test Simulation Command Line](#) > [#28 \[20180907_1649\]](#) > [Test Results](#) [ENABLE AUTO REFRESH](#)

[Back to Project](#)
[Status](#)
[Changes](#)
[Console Output](#)
[Edit Build Information](#)
[History](#)
[Environment Variables](#)
[Test Result](#)
[Failure Cause Management](#)
[Previous Build](#)

Test Result

1 failures (-1)

2 tests (±0)
Took 1 min 27 sec
[add description](#)

All Failed Tests

Test Name	Duration	Age
com.nomagic.magicdraw.simulation.TestSimulationCommandLine.testGenerateFailResult	49 sec	3

All Tests

Package	Duration	Fail	(diff)	Skip	(diff)	Pass	(diff)	Total	(diff)
com.nomagic.magicdraw.simulation	1 min 27 sec	1	-1	0		1	+1	2	

Test Result of the simulation command line is shown on the Jenkins page.

Simulate command arguments and parameters

Examples of the **simulate** command lines are as follows:

- On Windows: `simulate.bat -project "../../samples/simulation/HingeMonteCarloAnalysis.mdzip" -config "Monte Carlo Analysis"`
- On Mac OS: `sh simulate.sh -project "../../samples/simulation/HingeMonteCarloAnalysis.mdzip" -config "Monte Carlo Analysis"`

Type of argument	Parameter	Description
Mandatory argument	-project	Specify a file name with the path of a MagicDraw project. Both relative and absolute paths are supported.
	-config	Specify a SimulationConfig without a qualified name to run.  Note If SimulationConfig has duplicate names (in different package), a warning message will be displayed in the Simulation log, and the first name will be used.
	-properties propertiesFileName	Specify the name of a properties file to use, e.g., in the TestSimulationCommandLine.zip sample.  Note • If the -properties option is specified, the argument is the name of a properties file, and the mandatory argument is no longer required. • A properties file contains -project and -config, along with the specified data of each parameter.
Optional (server) argument	-servertype	Specify type of the server to connect, <i><tw></i> or <i><twcloud></i> , where <i><tw></i> is Teamwork Server, as the default type of the server, and <i><twcloud></i> is Teamwork Cloud.
	-server	Specify a name or an IP Address (and port) of the server.
	-login	Specify a login name to log on to the server.
	-password	Specify a password to log on to the server.
	-ssl	Specify to use and enable Secured Connection (SSL), <i><true></i> or <i><false></i> as the default value.
	-pversion	Specify the version of the server project.
	-tag	Specify the tag name of the server project.  Note • -tag can't be used with -pversion. • If multiple projects are returned, only the latest version will be run.
Teamwork Cloud argument	-branch	Specify a branch of Teamwork Cloud projects.  Note • -branch and -pversion cannot be specified in the same command. • If -pversion and -tag are not specified, the latest version of the specified branch will be returned.
	-updatemodule	Specify update project usages if required, <i><true></i> or <i><false></i> , where <i><false></i> is the default.
	-projectpassword	Specify a project password.

JUnit test sample: TestSimulationCommandLine.java

```
package com.nomagic.magicdraw.simulation;
```

```

import static org.junit.Assert.assertNotNull;
import static org.junit.Assert.assertTrue;
import static org.junit.Assert.fail;

import java.io.BufferedReader;
import java.io.File;
import java.io.IOException;
import java.io.InputStreamReader;
import java.nio.file.Files;
import java.nio.file.Path;

import org.junit.Before;
import org.junit.Test;

/**
 * A test class for running the simulation command line and checking for the pass/fail result.
 * @author Chanon S.
 */

public class TestSimulationCommandLine {
    private static final String MD_ROOT_PROPERTY = "md.root";
    private static final String PROPERTIES_FILES_PROPERTY = "properties.files.dir";
    private static final String MD_DIR = System.getProperty(MD_ROOT_PROPERTY);
    private static final String SIMULATION_COMMAND_LINE = MD_DIR + "/plugins/com.nomagic.magicdraw.
simulation/simulate.sh";
    private static final String PROPERTIES_FILES_DIR = System.getProperty(PROPERTIES_FILES_PROPERTY);
    private static final String PASS_PROPERTIES = "TestGeneratePassResult.properties";
    private static final String FAIL_PROPERTIES = "TestGenerateFailResult.properties";
    private static final String SYSTEM_NEW_LINE = System.getProperty("line.separator");

    @Before
    public void assertBuildExist() {
        System.out.println(MD_ROOT_PROPERTY + "=" + MD_DIR);
        System.out.println(PROPERTIES_FILES_PROPERTY + "=" + PROPERTIES_FILES_DIR);

        assertNotNull(MD_ROOT_PROPERTY + " is not specified.", MD_DIR);
        assertNotNull(PROPERTIES_FILES_PROPERTY + " is not specified.", PROPERTIES_FILES_DIR);

        assertTrue("MagicDraw directory does not exist, MD_DIR=" + MD_DIR, new File(MD_DIR).exists());
        assertTrue("Properties files directory does not exist, PROPERTIES_FILES_DIR=" +
PROPERTIES_FILES_DIR, new File(PROPERTIES_FILES_DIR).exists());
        assertTrue("Could not find simulate.sh file, SIMULATION_COMMAND_LINE=", new File
(SIMULATION_COMMAND_LINE).exists());
    }

    @Test(timeout = 120000)
    public void testGeneratePassResult() {
        // This project and Simulation Config generate "pass" as the result of TestCase.
        String propertyFilePath = PROPERTIES_FILES_DIR + "/" + PASS_PROPERTIES;
        String consoleOutput = runWithProperties(propertyFilePath);
        System.out.println("Console output=" + consoleOutput);
        boolean result = consoleOutput.contains(SYSTEM_NEW_LINE + "pass" + SYSTEM_NEW_LINE);
        assertTrue(consoleOutput, result);
    }

    @Test(timeout = 120000)
    public void testGenerateFailResult() {
        // This project and Simulation Config generate "fail" as the result of TestCase.
        String propertyFilePath = PROPERTIES_FILES_DIR + "/" + FAIL_PROPERTIES;
        String consoleOutput = runWithProperties(propertyFilePath);
        boolean result = consoleOutput.contains(SYSTEM_NEW_LINE + "pass" + SYSTEM_NEW_LINE);
        assertTrue(consoleOutput, result);
    }

    private String execute(String command) {
        System.out.println("Executing, command=" + command);

        StringBuilder result = new StringBuilder();
        try {
            Process p = Runtime.getRuntime().exec(command);

```

```

        BufferedReader input = new BufferedReader(new InputStreamReader(p.getInputStream()));

        String line;
        while ((line = input.readLine()) != null) {
            result.append(line);
            result.append(System.newLine());
        }
    } catch (IOException e) {
        e.printStackTrace();
    }
    return result.toString();
}

private String runWithProperties(String propFilePath) {
    String absPropPath = propFilePath;
    if (propFilePath != null) {
        Path path = new File(propFilePath).toPath();
        if (!Files.exists(path)) {
            fail("Properties file <" + propFilePath + "> not found.");
        } else {
            absPropPath = path.toAbsolutePath().toString();
        }
    }
    String cmd = propFilePath == null || propFilePath.isEmpty() ? SIMULATION_COMMAND_LINE :
SIMULATION_COMMAND_LINE + " -properties \"" + absPropPath + "\"";
    return execute(cmd);
}
}

```

Ant configuration file sample: run_junit.xml

```

<project name="Run JUnit and Generate Reports" default="build" basedir=".">
  <target name="build" depends="set.properties, prepare, run.junit" />
  <target name="set.properties">
    <property name="md.root" location="${md.root}" />
    <property name="properties.files.dir" location="${properties.files.dir}" />
    <property name="test.reports.dir" location="test-reports"/>
  </target>
  <target name="prepare">
    <delete dir="${test.reports.dir}" />
    <mkdir dir="${test.reports.dir}" />
  </target>
  <target name="run.junit">
    <junit printsummary="yes" fork="yes">
      <classpath>
        <pathelement location="lib/TestSimulationCommandLine.jar"/>
        <pathelement location="lib/junit-4.12.jar"/>
        <pathelement location="lib/hamcrest-core-1.3.jar"/>
      </classpath>
      <jvmarg value="-Xmx1200m" />
      <jvmarg value="-Xms256m" />
      <jvmarg value="-XX:PermSize=128M" />
      <jvmarg value="-XX:MaxPermSize=256M" />
      <jvmarg value="-XX:-UseSplitVerifier" />
      <jvmarg value="-noverify" />

      <sysproperty key="md.root" value="${md.root}" />
      <sysproperty key="properties.files.dir" value="${properties.files.dir}" />

      <batchtest todir="${test.reports.dir}">
        <zipfileset src="lib/TestSimulationCommandLine.jar">
          <include name="**/*.class"/>
        </zipfileset>
      </batchtest>
      <formatter type="xml" />
    </junit>
  </target>
</project>

```