


Adding Data Sources for an OSLC Provider

To add a Data Source for an OSLC Provider

1. Click  on the **DataHub Explorer** toolbar. The **Add Data Source** dialog opens.
2. From the **Driver** drop-down list, select **OSLC Provider**.

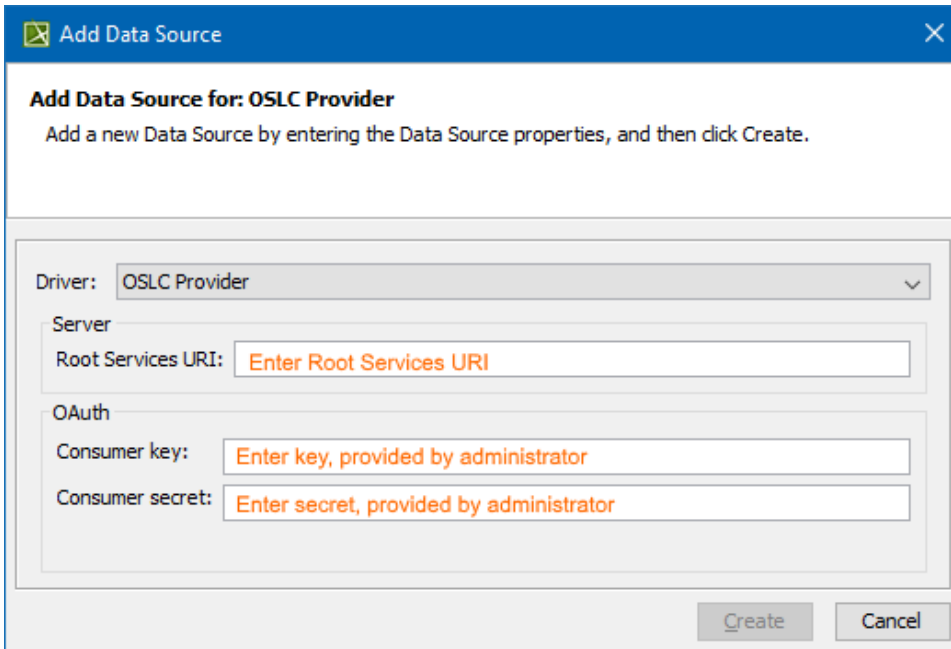

The screenshot shows a dialog box titled "Add Data Source" with a close button (X) in the top right corner. Below the title bar, the text "Add Data Source for: OSLC Provider" is displayed, followed by the instruction "Add a new Data Source by entering the Data Source properties, and then click Create." The dialog contains a "Driver" dropdown menu set to "OSLC Provider". Below this, there are two sections: "Server" and "OAuth". The "Server" section has a "Root Services URI" field with the placeholder text "Enter Root Services URI". The "OAuth" section has two fields: "Consumer key:" with the placeholder text "Enter key, provided by administrator" and "Consumer secret:" with the placeholder text "Enter secret, provided by administrator". At the bottom right of the dialog are two buttons: "Create" and "Cancel".

3. Enter the **Root Services URI**, **Consumer key**, and **Consumer secret** (provided by your administrator).
4. Click **Create**.

The new OSLC Provider is added to the **DataHub Explorer** tree.