


Thrown exception tag value translation

The stereotype «C++Operation» can be applied to an [Operation](#).

In the modeling tool stereotype, «C++Operation» must apply all operations; the default throw exception tag value is *any*.

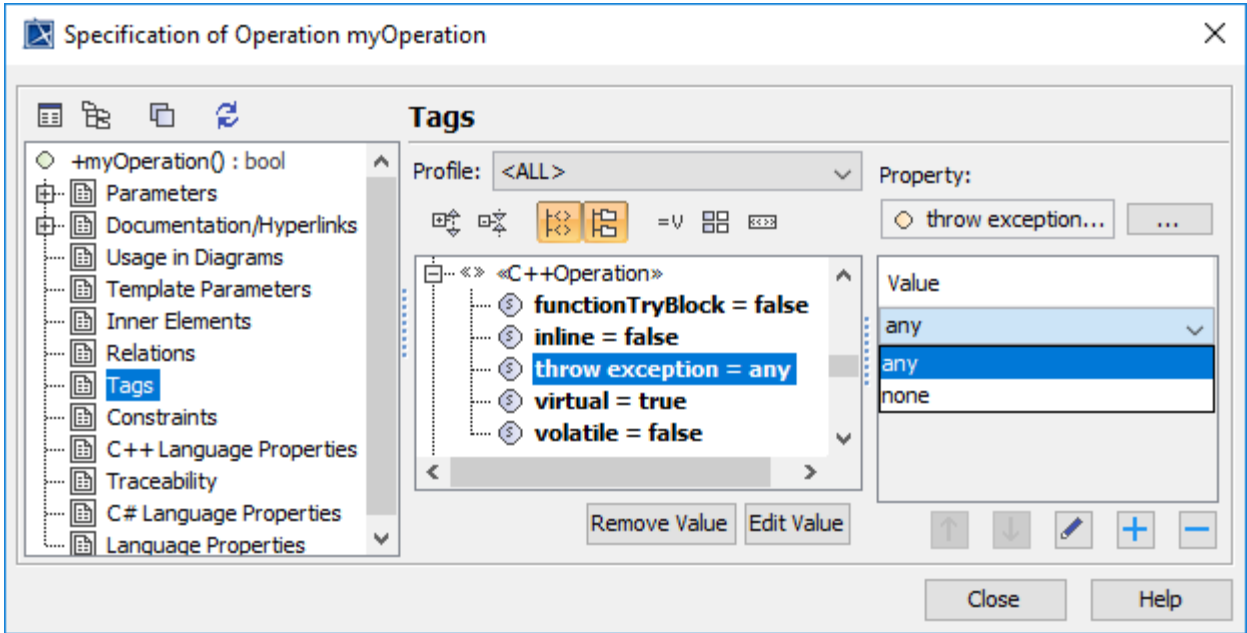

C++ThrownExceptions tag value

Old value	Translation
Operation does not apply the «C++Operation» stereotype in an old profile (C++ Profile).	Apply the «C++Operation» stereotype in a new profile (c++ ANSI profile) and set the throw exception tag value to any.
Operation applies the «C++Operation» stereotype in an old profile (C++ Profile) and set the C++ThrownExceptions tag value to any.	Apply the «C++Operation» stereotype in a new profile (c++ ANSI profile) and set the throw exception tag value to any. Remove the «C++Operation» stereotype (old profile) and the C++ThrownExceptions tag value.
Operation applies the «C++Operation» stereotype in old profile (C++ Profile) and set the C++ThrownExceptions tag value to none.	Apply the «C++Operation» stereotype in a new profile (c++ ANSI profile) and set the throw exception tag value to none. Remove the «C++Operation» stereotype (old profile) and the C++ThrownExceptions tag value.

Related Pages:

- [Translation Activity Diagram](#)
- [Language Properties](#)
- [Conversion with Array Type Modifiers](#)
- [Stereotypes from Old Project Version](#)
- [Thrown exception tag value translation](#)
- [Constructor and Destructor Name From Old Project Versions](#)
- [Data Type From Old Project Versions](#)
- [Code Engineering Sets](#)
- [Generating Code](#)
- [Reverse Options](#)
- [Global options for Code Engineering](#)
- [Files of Properties](#)
- [Java Code Engineering](#)
- [C++ Code Engineering](#)
- [C# Code Engineering](#)
- [CORBA IDL Mapping To UML](#)
- [WSDL](#)