


Specifying IRI ontology versions

An ontology may have an ontology IRI, the ontology's identifier. The ontology may or may not also have a **versionIRI**, the ontology's version identifier.

To specify an IRI ontology version to an exported concept model

1. Right-click a concept model you want to export and select **Specification**. The Specification window opens.
2. On the left pane, select **Tags**.
3. In the tree structure, do one of the following

- Double-click **versionIRI**.
- Select **versionIRI** and click **Create Value**.

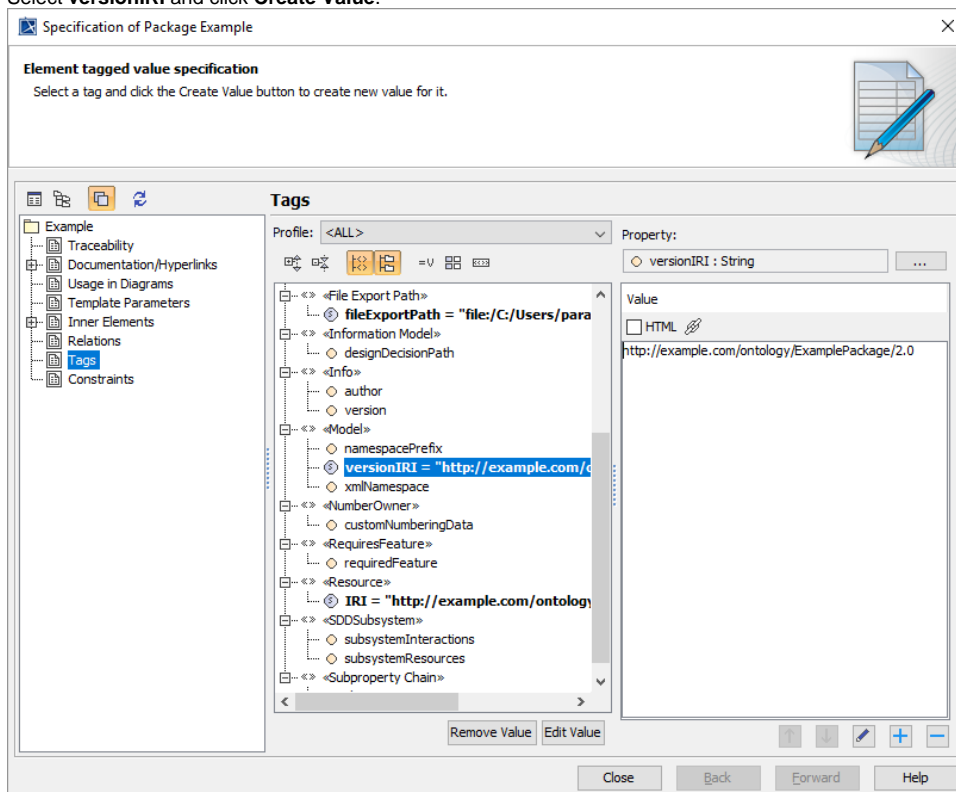

4. The **Value** box appears on the right side of the dialog.
5. In the **Value** box, specify the version for the exported concept model.
6. Click **Close**.

After you export the concept model, the **versionIRI** tag is displayed in the exported ontology file to show the version number.

```
C:\Users\paranur_c\Documents\OWL\Cascade\ExampleConceptModel.rdf - Notepad++
File Edit Search View Encoding Language Settings Macro Run Plugins Window ?
ExampleConceptModel.rdf
1 <?xml version="1.0" encoding="UTF-8"?>
2 <rdf:RDF xmlns="http://example.com/ontology/ExampleConceptModel#"
3   xml:base="http://example.com/ontology/ExampleConceptModel"
4   xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
5   xmlns:owl="http://www.w3.org/2002/07/owl#"
6   xmlns:xml="http://www.w3.org/XML/1998/namespace"
7   xmlns:xsd="http://www.w3.org/2001/XMLSchema#"
8   xmlns:rdfs="http://www.w3.org/2000/01/rdf-schema#">
9   <owl:Ontology rdf:about="http://example.com/ontology/ExampleConceptModel">
10     <owl:versionIRI rdf:resource="1.0"/>
11   </owl:Ontology>
12
```

The versionIRI tag is displayed in the RDF file.

Related pages

- [Usage](#)
- [Exporting your concept model to an OWL ontology](#)