


Configuring Teamcenter Integration plugin

Before starting to use the Teamcenter Integration plugin, you have to configure it in a modeling tool.

To configure the Teamcenter plugin

1. Start your modeling tool and open or create a SysML project.
2. In the main menu, go to **Options > Environment**.
3. From the list on the left side of the **Environment Options** dialog, select **Teamcenter Integration Plugin**.
4. In the option specification area, specify the **User**, **Connection Type**, **Server URL** and **Embedded Active Workspace URL** option values.

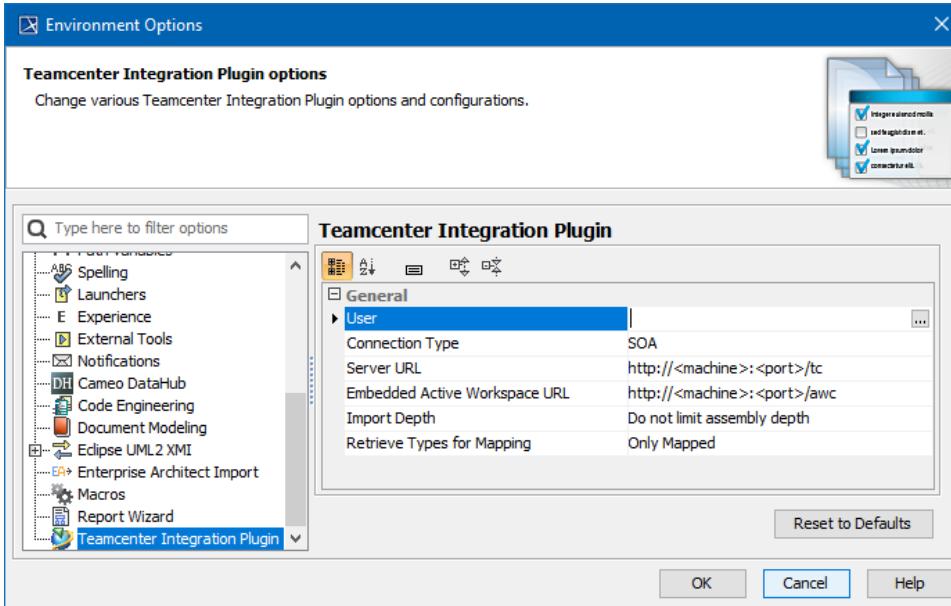

5. If needed, change the values of the **Import Depth** and **Retrieve Types for Mapping** options (optional).
6. Click **OK** to close the dialog.

When the configuration is finished, you can [connect to the Teamcenter server](#) and start working.

Related pages

- [Software requirements](#)
- [Installing Teamcenter Integration plugin](#)