


Creating a datatype property


AVAILABLE FROM 18.0 SP13

To model a datatype property as a class attribute

1. Create a class, name it *Class 1*.
2. Click on the black circle with the white plus sign in the center of it.

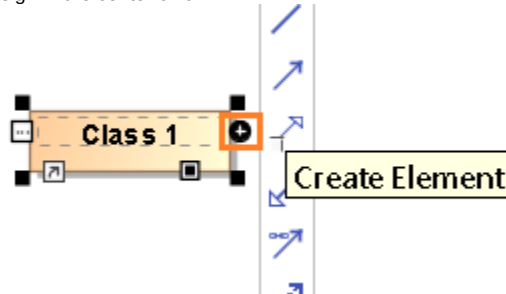


3. Select **Property**.

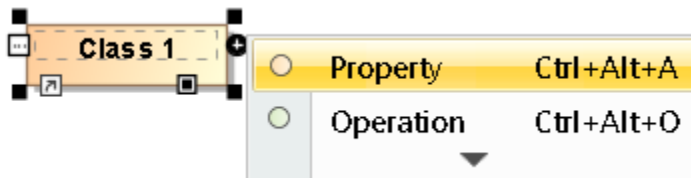

4. A default property appears in the class. The property is also called a *class attribute*.




5. Double - click on the default property. Its **Specification window** appears.

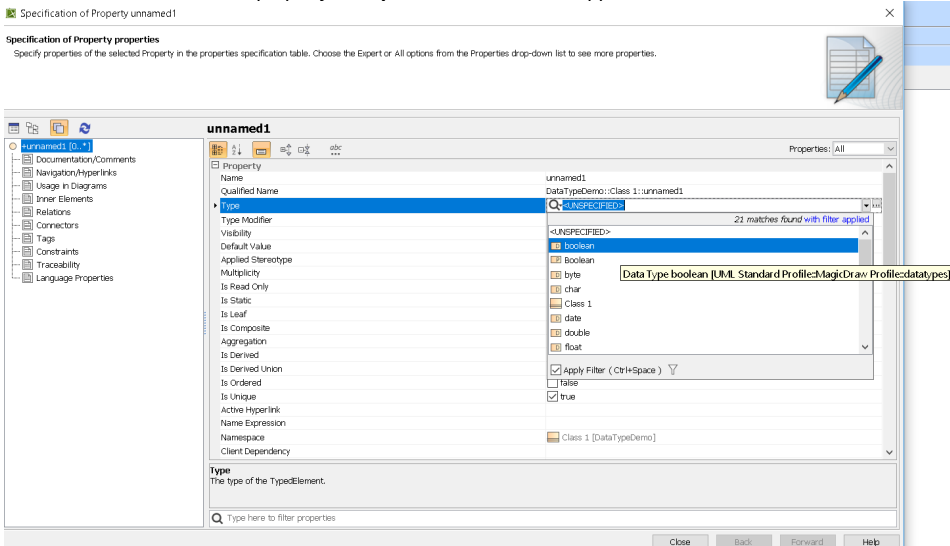

6. Click on the **Type** field. A shortcut menu appears. Select *boolean*. (or any datatype property you want)
7. Click **Close**.

The result should look like this:



The class element with a datatype property *unnamed1*.