


# Adding Data Sources for an OSLC Provider

To add a Data Source for an OSLC Provider

1. Click  on the **DataHub Explorer** toolbar. The **Add Data Source** dialog opens.
2. From the **Driver** drop-down list, select **OSLC Provider**.

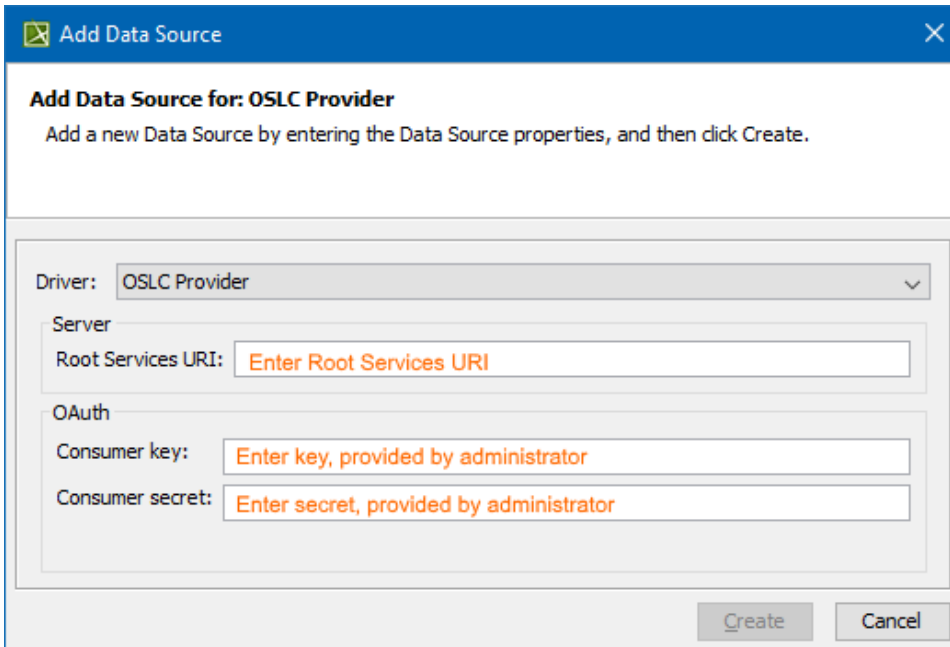

The screenshot shows a dialog box titled "Add Data Source" with a close button (X) in the top right corner. Below the title bar, the text "Add Data Source for: OSLC Provider" is displayed, followed by the instruction "Add a new Data Source by entering the Data Source properties, and then click Create." The dialog contains a "Driver" dropdown menu set to "OSLC Provider". Below this, there are two sections: "Server" and "OAuth". The "Server" section has a "Root Services URI" field with the placeholder text "Enter Root Services URI". The "OAuth" section has two fields: "Consumer key" with the placeholder text "Enter key, provided by administrator" and "Consumer secret" with the placeholder text "Enter secret, provided by administrator". At the bottom right of the dialog are two buttons: "Create" and "Cancel".

3. Enter the **Root Services URI**, **Consumer key**, and **Consumer secret** (provided by your administrator).
4. Click **Create**.

The new OSLC Provider is added to the **DataHub Explorer** tree.